


STACKING S 120 H NAKED - INDOOR

David Rockwell, 2023

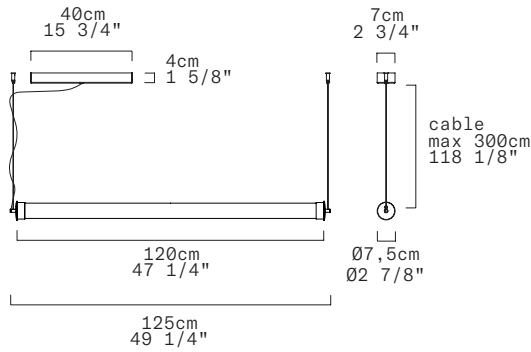

Discover more

REPLACEABLE LED

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012503		
	LED 2700K	0012504		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013385		
	LED 2700K	0013386		

TECHNICAL SHEET

MATERIALS Diffuser: Polymethacrylate
Structure: Aluminium

DIMENSIONS Diffuser: [Ø2 7/8" L49 1/4"] Ø7,5cm L120cm
Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm
Cable length: [118 1/8"] 300cm

CANOPY Matte White

LIGHT SOURCE 5 X LED STRIP 28,75W (total) 2585 lm (delivered) 3000K CRI≥90
5 X LED STRIP 28,75W (total) 2533 lm (delivered) 2700K CRI≥90

DIMMING PROTOCOL 0/1-10V; Phase cut

MARKING DRY LOCATION



NET WEIGHT 7,49 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information