


STACKING S 60 V NAKED - INDOOR

David Rockwell, 2023

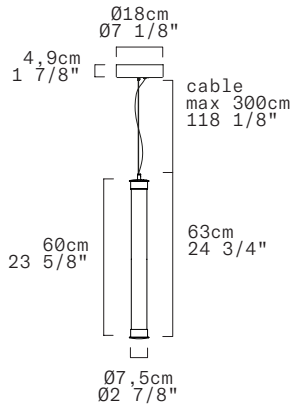

Discover more

REPLACEABLE LED

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

| DIMMING PROTOCOL | 0/1-10V; Phase cut | | | |
|---------------------------------|--------------------|---------|-----|------|
| FINISH (DIFFUSER + STRUCTURE) | SOURCE | CODE | QTY | TYPE |
| Transparent + Anodized Aluminum | LED 3000K | 0012507 | | |
| | LED 2700K | 0012508 | | |

24Vdc version installation with remote driver

(supplied without canopy & driver)

| DIMMING PROTOCOL | Driver and canopy not included | | | |
|---------------------------------|--------------------------------|---------|-----|------|
| FINISH (DIFFUSER + STRUCTURE) | SOURCE | CODE | QTY | TYPE |
| Transparent + Anodized Aluminum | LED 3000K | 0013389 | | |
| | LED 2700K | 0013390 | | |

TECHNICAL SHEET

MATERIALS Diffuser: Polymethacrylate
Structure: Aluminum

DIMENSIONS Diffuser: [Ø2 7/8" H23 5/8"] Ø7,5cm H60cm
Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm
Cable length: [118 1/8"] 300cm

CANOPY Matte White

LIGHT SOURCE 5 X LED STRIP 13,75W (total) 1236 lm (delivered) 3000K CRI≥90
5 X LED STRIP 13,75W (total) 1211 lm (delivered) 2700K CRI≥90

DIMMING PROTOCOL 0/1-10V; Phase cut

MARKING DRY LOCATION



NET WEIGHT 4,40 Ibs

| | |
|----------------|--|
| PROJECT NAME | |
| SPECIFIER NAME | |

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information