


AURELIA S 45 SS (SINGLE SWITCH) - INDOOR

Patrick Jouin, 2021



Direct light +
Indirect light

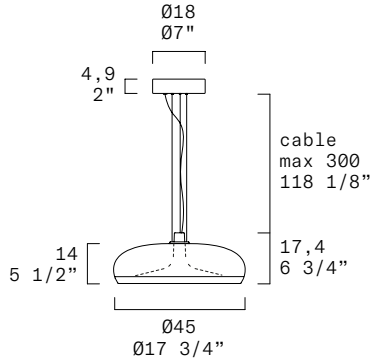

Discover more

REPLACEABLE LED

North America

LEUCOS



[10]

110-240Vac 50-60Hz standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V; Dali			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Smoke Grey + Matte White	LED 3000K LED 2700K	0013105 0013106		
[2] Smoke Grey + Vintage Brass	LED 3000K LED 2700K	0013107 0013108		
[3] Smoke Grey + Matte Gunmetal	LED 3000K LED 2700K	0013109 0013110		
[4] Shaded Burgundy + Matte White	LED 3000K LED 2700K	0013111 0013112		
[5] Shaded Burgundy + Vintage Brass	LED 3000K LED 2700K	0013113 0013114		
[6] Shaded Burgundy + Matt Gunmetal	LED 3000K LED 2700K	0013115 0013116		
[7] Transparent water effect + Matte White	LED 3000K LED 2700K	0013118 0013119		
[8] Transparent water effect + Vintage Brass	LED 3000K LED 2700K	0013120 0013121		
[9] Transparent water effect + Matte Gunmetal	LED 3000K LED 2700K	0013122 0013123		
[10] Blue water effect + Matte White	LED 3000K LED 2700K	0013124 0013125		
[11] Blue water effect + Vintage Brass	LED 3000K LED 2700K	0013126 0013127		
[12] Blue water effect + Matte Gunmetal	LED 3000K LED 2700K	0013128 0013129		
[13] Transparent pulegoso with metal powder inclusion + Matte White	LED 3000K LED 2700K	0013130 0013131		
[14] Transparent water effect + Vintage Brass	LED 3000K LED 2700K	0013132 0013133		
[15] Transparent pulegoso with metal powder inclusion + Matte Gunmetal	LED 3000K LED 2700K	0013134 0013135		

TECHNICAL SHEET

MATERIALS Diffuser: Blown Glass
Structure: Metal

CANOPY Matte White

DIMENSIONS Diffuser: [Ø17 3/4" H5 1/2"] Ø45 cm H14 cm
Canopy: [Ø7" H2"] Ø18 cm H4,9cm
Cable length: [118 1/8"] 300 cm

LIGHT SOURCE

Smoke Grey Diffuser:
 Direct: LED 1 X 11,6W
 Indirect: 1 X LED STRIP X 14,4W
 Total 1375 lm (deliver) 3000K CRI≥90
 Total 1321 lm (deliver) 2700K CRI≥90

Transparent Water Effect Diffuser:
 Direct: LED 1 X 11,6W
 Indirect: 1 X LED STRIP X 14,4W
 Total 1513 lm (deliver) 3000K CRI≥90
 Total 1453 lm (deliver) 2700K CRI≥90

All other finishes:
 Direct: LED 1 X 11,6W 1531 lm (nominal) 3000K CRI≥90
 Indirect: 1 X LED STRIP X 14,4W 2450 lm (nominal) 3000K CRI≥90
 or
 Direct: LED 1 X 11,6W 1471 lm (nominal) 2700K CRI≥90
 Indirect: 1 X LED STRIP 14,4W 2360 lm (nominal) 2700K CRI≥90

DIMMING PROTOCOL Push-dim; 0/1-10V; Dali

MARKING DRY LOCATION



NET WEIGHT 20,50 Ibs

ON REQUEST

Version for installation with remote driver
(supplied without canopy & driver)

DIMMING PROTOCOL Driver and canopy not included

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information