


STACKING S 120 H RIG - INDOOR

David Rockwell, 2024

North America

LEUCOS

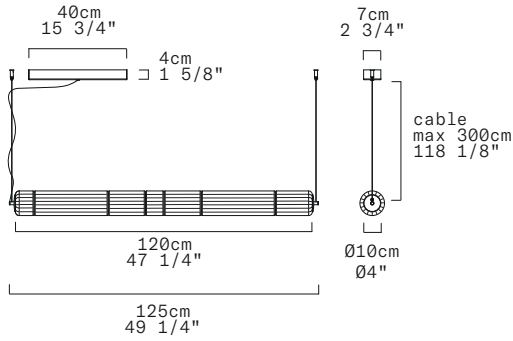

Discover more

REPLACEABLE LED



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013575		
	LED 2700K	0013576		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013577		
	LED 2700K	0013578		

TECHNICAL SHEET

MATERIALS Diffuser: Blown Borosilicate Glass
Structure: Aluminum

DIMENSIONS Diffuser: [04" L47 1/4"] Ø10cm L120cm
Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm
Cable length: [118 1/8"] 300cm

CANOPY Matte White

LIGHT SOURCE 5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90
5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90

DIMMING PROTOCOL 0/1-10V; Phase cut

MARKING DRY LOCATION



NET WEIGHT 15,65 Ibs

PROJECT NAME

SPECIFIER NAME

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

11 Mayfield Avenue, Edison, NJ 08837 – USA
Tel +1 (732) 225-0010

<https://www.leucos.com/en-us/info.us@leucos.com>