


STACKING S 180 H RIG - INDOOR

David Rockwell, 2024


North America

LEUCOS

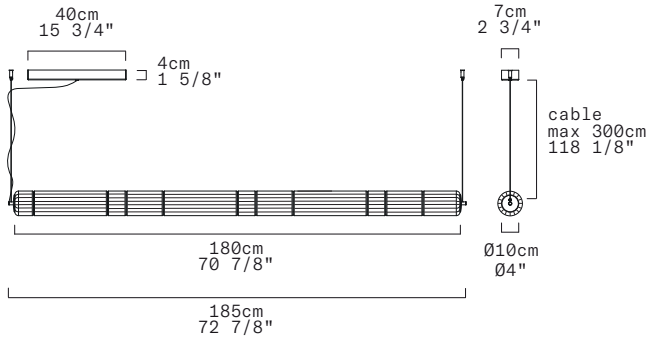

Discover more

REPLACEABLE LED

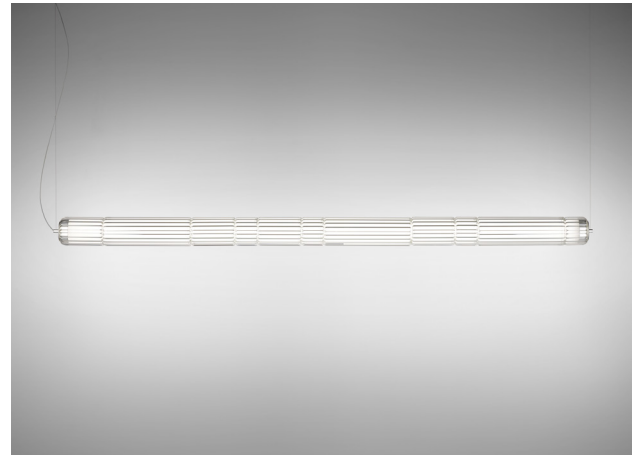

TECHNICAL SHEET

MATERIALS Diffuser: Blown Borosilicate Glass
Structure: Aluminum

DIMENSIONS Diffuser: [04" L70 7/8"] Ø10cm L180cm
Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm
Cable length: [118 1/8"] 300cm

CANOPY Matte White

LIGHT SOURCE 5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90
5 X LED STRIP 43,75W (total) 3539 lm (delivered) 2700K CRI≥90

DIMMING PROTOCOL 0/1-10V; Phase cut

MARKING DRY LOCATION



NET WEIGHT 27,11 Ibs

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013571		
	LED 2700K	0013572		
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013772		
	LED 2700K	0013773		

ON REQUEST

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013776		
	LED 2700K	0013777		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

11 Mayfield Avenue, Edison, NJ 08837 – USA
Tel +1 (732) 225-0010

<https://www.leucos.com/en-us/info.us@leucos.com>

STACKING S 180 H RIG - INDOOR

David Rockwell, 2024

**24Vdc version installation with remote driver
(supplied without canopy & driver)**

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013573		
	LED 2700K	0013574		
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013774		
	LED 2700K	0013775		

ON REQUEST

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013778		
	LED 2700K	0013779		