


STACKING S 180 H RIG - INDOOR

David Rockwell, 2024

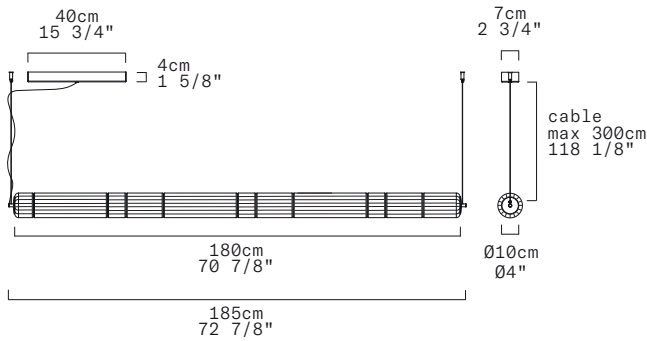


Discover more

REPLACEABLE LED

North America

LEUCOS

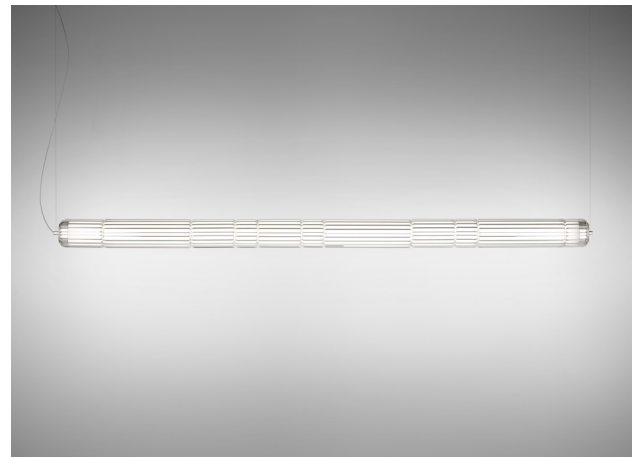

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013571		
	LED 2700K	0013572		
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013914		
	LED 2700K	0013915		
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013772		
	LED 2700K	0013773		
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013776		
	LED 2700K	0013777		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013573		
	LED 2700K	0013574		
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013780		
	LED 2700K	0013781		
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013774		
	LED 2700K	0013775		
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013778		
	LED 2700K	0013779		

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [04" L70 7/8"] Ø10cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable length: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3539 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	27,11 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information