


STACKING S 120 H RIG - INDOOR

David Rockwell, 2024


LEUCOS



Discover more

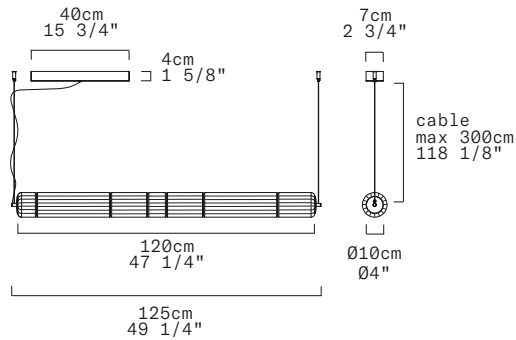

REPLACEABLE LED

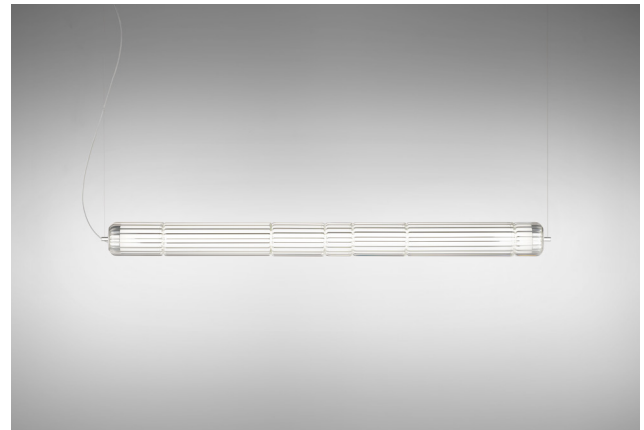

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L120cm [Ø4" 47 1/4"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 28,75W (total) 3306 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 28,75W (total) 3162 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP20
NET WEIGHT	7,1 kg

ⓘ Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013545
	LED 2700K	0013546
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013876
	LED 2700K	0013877
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013846
	LED 2700K	0013847
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013848
	LED 2700K	0013849

ⓘ Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013547
	LED 2700K	0013548
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013790
	LED 2700K	0013791
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013784
	LED 2700K	0013785
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013788
	LED 2700K	0013789

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information