


STACKING S 180 H RIG - INDOOR


David Rockwell, 2024

LEUCOS

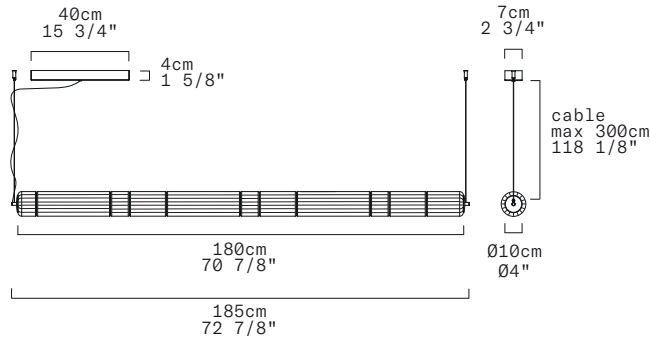

Discover more

REPLACEABLE LED

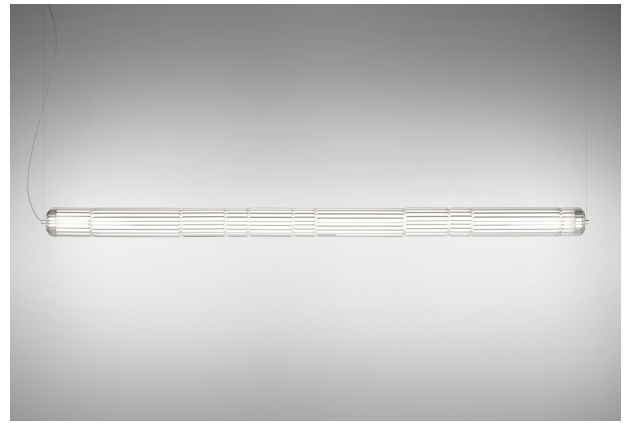

⊕ Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013541
	LED 2700K	0013542
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013874
	LED 2700K	0013875
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013842
	LED 2700K	0013843
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013844
	LED 2700K	0013845

⚠ Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013543
	LED 2700K	0013544
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013780
	LED 2700K	0013781
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013774
	LED 2700K	0013775
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013778
	LED 2700K	0013779

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L180cm [Ø4" 70 7/8"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 43,75W (total) 5031 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 43,75W (total) 4812 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP20
NET WEIGHT	12,3 kg

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information