


STACKING S 90 V RIG - INDOOR


David Rockwell, 2024

LEUCOS

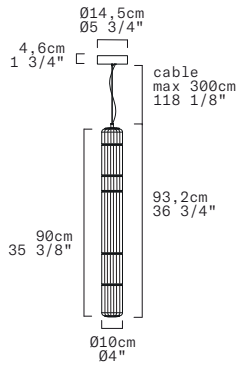

Discover more

REPLACEABLE LED

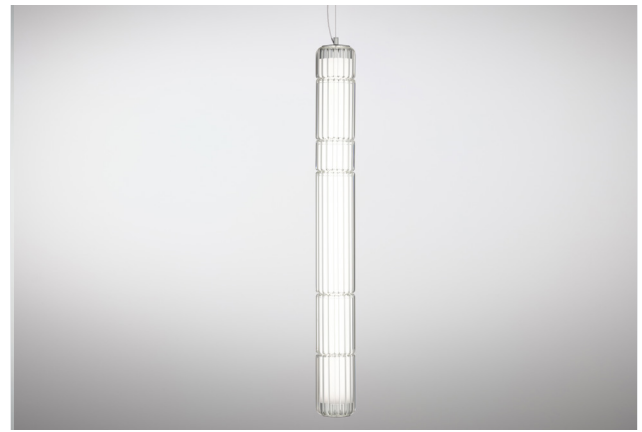



Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013549
	LED 2700K	0013550
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013878
	LED 2700K	0013879
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013850
	LED 2700K	0013851
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013852
	LED 2700K	0013853

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013551
	LED 2700K	0013552
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013800
	LED 2700K	0013801
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013794
	LED 2700K	0013795
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013798
	LED 2700K	0013799

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H90cm [Ø4" 35 3/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"] Cable length: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	 
NET WEIGHT	5,4kg

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information